



Model 195Eg Cabinet Mounting w/o Lightning Protection

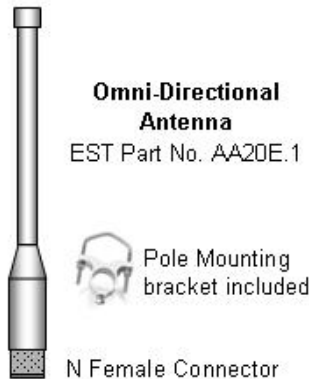

Directional Antennas

For Point to Point Applications use EST Part No. AA204ES

For Point to Multi-point Application use EST Part No. AA203ES

Pole mounting brackets included.

Caution

To comply with the FCC exposure compliance requirements, a separation distance of at least 19 cm must be maintained between the antenna and all persons.

NOTES

1. Vapor wrap all external antenna coax connections with vinyl wrap (EST Part No. AA241) and apply Scotchkote Electrical Coating (EST Part No. AA242).
2. Contact EST for recommendations regarding antenna mounting hardware and installation tips.
3. Ground antenna structure, base and lightning arrester.

Antenna Feedline Recommendations				
		EST Antenna Part No.		
	Feedline Type	20E.1	203ES	204ES
< 25 ft. Length	RG-8	AA230	AA227	AA227
> 25 ft. Length	Heliac	AA240	AA224	AA224

NOTE: AA224 Heliac cable requires EST Cable, AA228LMR
AA240 Heliac cable requires EST Cable, AA230LMR



ESTeem Resources
EST Part No. AA109



RS-232 Programming Interface Cable
EST Part No. AA0621.1

