


RS-232C Cable

RJ-45 to 9 Pin Female Sub D

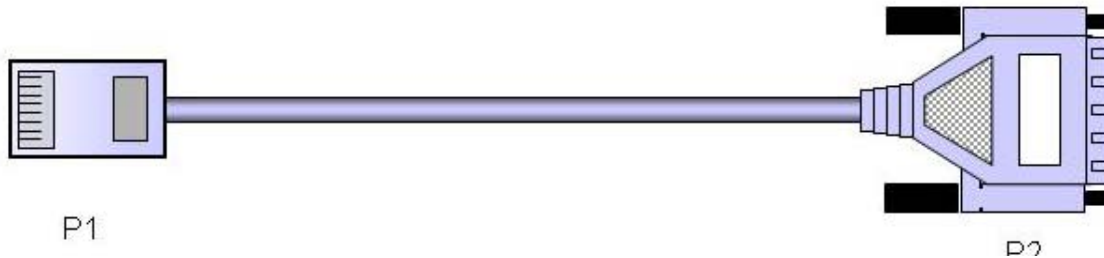

Specifications

Connectors:

P1: RJ-45

P2: D-Subminiature 9 pin female

Cable: 8 conductors. 28 AWG Aluminum/Mylar foil shielding. 6 ft.

Pinout:

P1		P2
1	DSR	6
2	DCD	1
3	DTR	4
4	GND	5
5	RxD	2
6	TxD	3
7	CTS	8
8	RTS	7

Specifications subject to change without notice.
Revised: 1/18/07